Atlas Copco

Technical Specifications

6 Tonne Capacity Scooptram® LHD
Atlas Copco Wagner Inc.

ST-3.5

Dimensions in mm

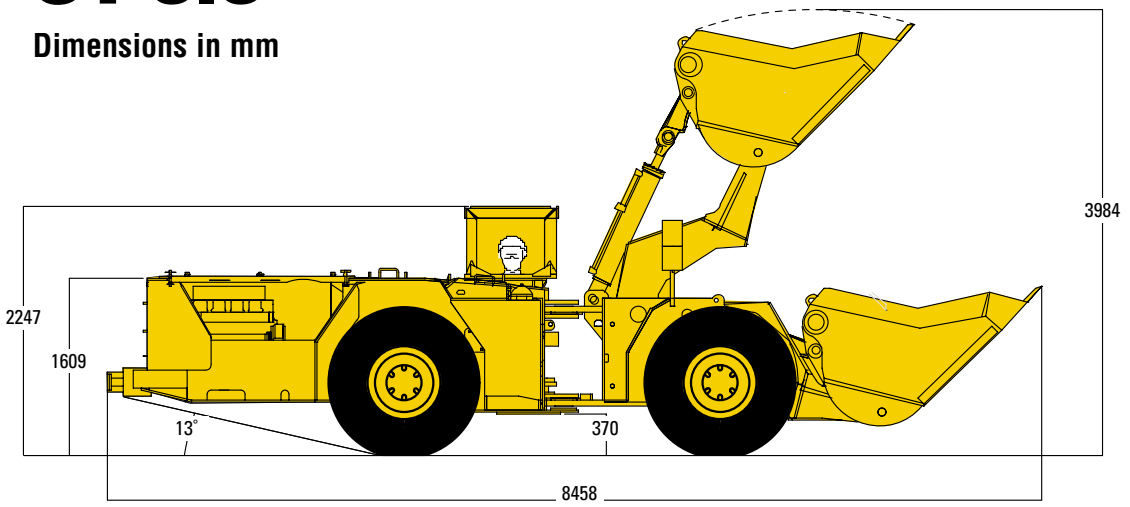

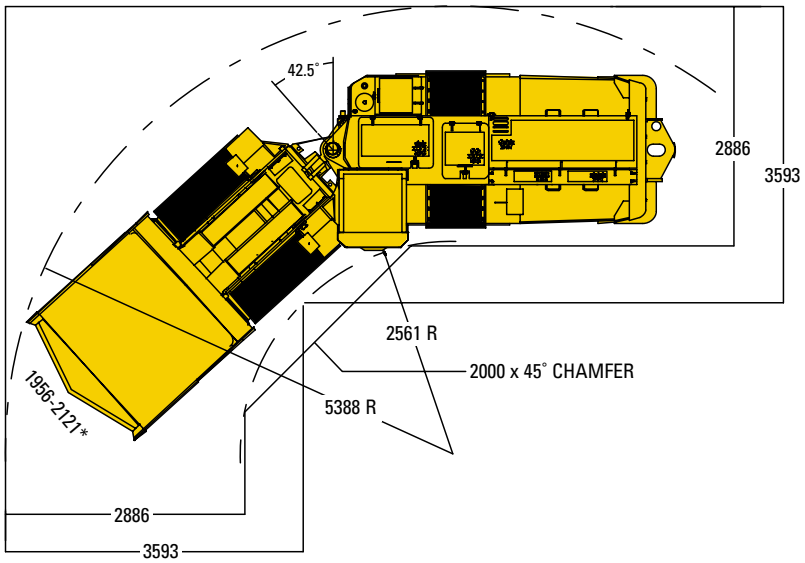

* Width depends on bucket volume sized to material density

Main Components

Canopy.....MSHA-ISO ROPS/FOPS Certified
Bucket Volume.....3.1 m^3 (Standard)
Engine.....Deutz Diesel
Axles.....Rock Tough®
Brakes.....SAHR®

Atlas Copco

Atlas Copco

Technical Specifications

6 Tonne Capacity Scooptram® LHD

ST-3.5

Capacity
Tramming Capacity.....6000 kg (13,200 lbs)

Engine
Deutz Diesel.....F8L-413FW
136 kW (185 hp)

Exhaust System
Catalytic Purifier Plus Exhaust Silencer

Brakes
Service.....SAHR®

Spring Applied Hydraulically Released; Fully Enclosed,
Oil Cooled, Multiple Wet Discs at Each Wheel End

Parking and Emergency.....SAHR®

Tires
Tire Size, Front & Rear.....17.50 x 25, 20 Ply, L-5S

Operator's Arrangement
Side Seating for Bi-Directional Operation & Maximum Visibility,
MSHA-ISO ROPS/FOPS Certified Canopy

Operating Weight (Approximately)
Empty.....17510 kg (38,600 lbs)

Selected Options:
E-O-D® Bucket
Fire Suppression
Auto Lube
Radio Remote Control with Tow Hook
Water Scrubber

© Copyright 2000 Atlas Copco Wagner Inc.
Scooptram, Rock Tough, E-O-D, and SAHR are registered trademarks of Atlas Copco Wagner Inc.
Atlas Copco is a registered trademark of Atlas Copco AB.
All rights reserved.

McDowell Since 1968®

2018 Kingsway Blvd.
Sudbury, Ontario, Canada P3B 4J8
Tel: +1 (705) 566-8190
www.bmcdowell.com
sales@bmcdowell.com

Atlas Copco