350X4

SAE Net Horsepower: 268 HP (200 kW)
Operating Weight: 82,400 lbs. (37 400 kg)
Digging Depth: 24 ft 1 in (7.34 m)

McDowell - Since 1968 -
2018 Kingsway Blvd
Sudbury, Ontario Canada P3B 4J8
+1(705)566-8190
www.bmcdowell.com
sales@bmcdowell.com



SPECIFICATIONS

Link-Belt
EXCAVATORS



Performance, Productivity and Reliabilty Come Standard

Link-Belt X4 Series excavators are built to exceed your expectations. We redesigned the control spools and incorporated spool stroke control (SSC) functions into the hydraulic system to reduce pressure loss and distribute hydraulic oil more smoothly, improving cycle times by up to 8%. Expect more power and fuel efficiency, thanks to an innovative Final Tier 4 engine that delivers up to 8% improved fuel efficiency, **without a Diesel Particulate Filter (DPF) to maintain or replace!** Settle in to the roomiest, most accommodating cab in its class, with more legroom and a new high-back, heated seat for shift-long comfort. Daily maintenance is a snap, with ground-level access to all service points, easily opened by hand.



Innovation and Attention to Details at Every Level



- Three power modes (Speed Priority, Heavy and Applied Power) let you **choose the best blend of power, precision and fuel savings** for the work you're doing



- EPA Final Tier 4 engine is **fuel efficient without sacrificing power**



- **No DPF** to ever worry about!
- 2-3% DEF (Diesel Exhaust Fluid) consumption rate relative to fuel consumption, combined with one of the largest DEF tank capacities lets you work long hours between refills



- Ground level access to routine service points lets you **cut daily maintenance down to just minutes**



- Quiet, pressurized cab offers **excellent visibility and comfortable, best-in-class seating**
- Enough floor space to **accommodate the largest of work boots**, with cup holders and roomy storage compartments for cell phones, snacks and other personal items



- Dual cab working lights are standard, or choose optional LEDs for **added visibility**

- Ergonomic joysticks **fit your hand perfectly**




- 7" high-definition LCD monitor **keeps you connected to your machine and work environment**



- RemoteCARE® telematics **keeps a watchful eye** on performance, maintenance intervals and theft deterrence



- Full-time, rear-view camera display is standard; add the WAVES™ option for a **seamless 270° view around the machine**



- Structural improvements to the boom and arm **reduce stress and provide greater durability**



- Robust undercarriage features **larger track rollers and thicker plating for longer life**
- Unique side-frame design **reduces dirt accumulation** and is **easier to clean**



**All improvements and percentage increases are in reference to Link-Belt X3 Series excavators, unless otherwise stated*

Quick and Responsive to Take On Tough Challenges



Greater digging power and increased lift capacities are the result of our innovative Spool Stroke Control (SSC) system, which reduces pressure loss and distributes hydraulic oil more smoothly. Pilot pressure sensors detect the type of work being done-such as digging or leveling-and then relays that data to proportional solenoid valves that quickly determine where optimal hydraulic pressures should be directed for that operation.


Two electronically-controlled Kawasaki variable-displacement axial-piston pumps and one Kawasaki gear pump assure that hydraulic power is delivered precisely when and where it's needed. At the same time, hydraulic flows in noncritical areas of the system are reduced.

The result is better breakout force, more lifting strength and faster machine response. You'll dig, swing and dump quicker than ever before... with up to 8% faster cycle times and improved fuel efficiency!

- Proprietary hydraulic system
- New control valve with larger ports; less restriction means improved hydraulic flow for increased performance
- Electronically-controlled pumps for improved cycle times, quicker response and more efficient machine operation
- Move more dirt per gallon of fuel





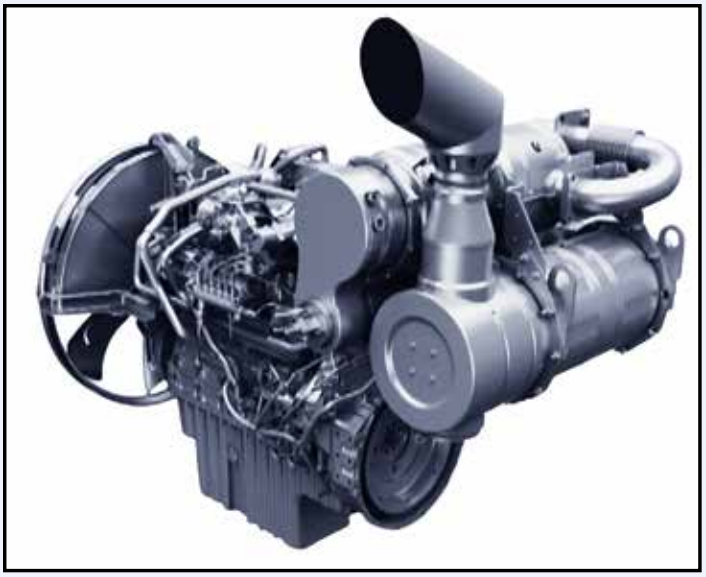

The X4 Series features innovative EPA-certified Final Tier 4 engines from Isuzu that strike the ultimate balance between power, productivity and fuel efficiency. You'll experience up to 8% improved fuel efficiency, without having to worry about costly diesel particulate filters (DPF) to maintain or replace. Three engine modes provide reliable power and control for any machine application. Choose Speed Priority (SP mode) to get jobs done quickly, Heavy (H mode) for the best blend of power and fuel savings or Applied Power (A mode), with 13 different RPM settings for precise control of heavy lifting, fine grading or leveling work.

- EPA-certified Tier 4 Final
- No DPF to maintain
- Up to 8% improved fuel economy
- 500-hr. fuel filters service intervals
- 8 diesel tank refills per 1 diesel exhaust fluid (DEF) refill
- 2-3% DEF consumption rate
- Two-stage DEF anti-freeze system for protection in harsh operating conditions
- 30 hrs. between auto SCR regenerations, only takes 5-8 minutes to complete!
- VGT (Variable Geometry Turbocharger)







Power and Efficiency Without Compromise



The X4 Series offers one of the most advanced and roomiest cabs in its class. Comfortable, automotive-grade high-back seat with head rest provides superior lumbar back support. With a longer and wider seating surface, it reclines to a 155° maximum reclining angle to create a relaxed environment during breaks. Air-suspension seat is standard with tilting adjustment and seat heaters available as options.

The cab layout also includes ergonomically-designed arm rests that move with console, maintaining a constant distance between joysticks and arm rests no matter how the seat is adjusted.

- Quiet, pressurized cab
- Joysticks with easy-to-hold grip and switches
- Handy 'radio mute' and one touch wiper switch
- Optional proportional joysticks w/auxiliary hydraulics control
- Cup holder and storage areas for cell phones and other small items
- Dual halogen cab lights standard
- Full time rear camera display
- Optional RH & LH side cameras
- ROPS and FOPS Level 1 certified, optional FOPS Level 2 head guard available
- Optional LED lights use less energy and are 3X brighter!
- Optional retractable rear window shade
- Optional front sun visor
- Improved radio with USB port and Bluetooth for hands-free communication.




High-Definition LCD monitor has a full-color 7" display that rivals the resolution found in luxury automobiles. Controls are easy to read and easy to use. The rear-view camera activates automatically whenever the machine is started, and sight guidelines have been added for increased safety.

- Anti-glare coating on screen
- Track up to 14 service maintenance reminders
- System/machine warning messages
- Easy-to-use auto idle and auto shutdown feature
- Select and set up attachments: 5 presets for breakers; 5 presets for crushers
- In-cab flow and pressure controls for auxiliary hydraulics
- Anti-theft system
- Auto-adjusts for time and calendar
- 24 languages available
- Ability to view fuel consumption

270° WAVES™

WIDE-ANGLE VISUAL ENHANCEMENT SYSTEM

For the ultimate in visibility, X4 machines can be fitted with the Wide Angle Visual Enhancement System - or WAVES for short. Using three closed-circuit cameras, this optional viewing system provides an unbelievable 270° visual coverage around the machine, eliminating any potential blind spots from the operator's line of sight. WAVES images can be displayed on the standard X4 monitor.

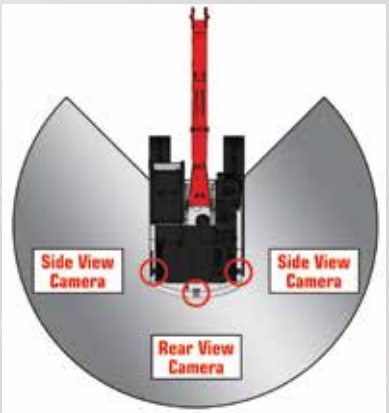



Get Working Fast With Easy Access to Service Points

Maintenance is a snap, with ground level access to all routine service points, including batteries, fuel filters, engine oil filter, dual-element air filter and cab fresh air filter.

- Radiator screens are easy to remove and clean from ground level...no tools needed!
- A/C Condenser tilts for easy cleaning and maintenance
- Easy battery compartment access; 2 hand-turn knobs
- Improved battery disconnect switch with no keys needed
- Convenient ground-level sample ports in pump compartment
- Green drain plug and hose
- More data collection points
- Automatic door locking mechanism on side door
- Quick and easy access to grease all attachment pivot points
- Grease cylinder track adjusters make adjusting track tension a breeze
- New undercarriage side frame design enables easier cleaning
- In-cab reminders track 14 different maintenance procedures

RemoteCARE® TELEMATICS WITH NO SUBSCRIPTION FEE

RemoteCARE® lets you remotely monitor and track machine location, operational performance, working status and periodic maintenance requirements - now at no cost to you. It tracks and records both routine and major service intervals for your machines, giving you more flexibility and control when scheduling maintenance procedures. It also lets you be more proactive if potential failure conditions arise; whenever a diagnostic trouble code (DTC) is detected, a warning message appears on the machine display, and an e-mail alert is automatically sent to you. RemoteCARE also assists in theft prevention by offering 24/7 surveillance and geofencing capabilities.

FREE Subscription Includes:

- ✓ 24/7 Remote Monitoring and Security
- ✓ Machine Location
- ✓ Geo-fence & Curfew Range
- ✓ Actual Fuel Consumption
- ✓ Fuel Levels
- ✓ Hour Meter Reading
- ✓ Radiator Water Temperature
- ✓ Machine Working Time/Idle Time
- ✓ Attachment Working Hours
- ✓ Working Modes
- ✓ Service Maintenance Reminders
- ✓ Service Warnings



RemoteCARE® App

Manage your Link-Belt equipment with this user friendly telematics management tool with GPS technology. The RemoteCARE App provides timely and reliable machine utilization – as well as assisting in DTC notifications. With RemoteCARE you will be able to remotely monitor and track your machine's location, operational performance, and working status. Contact your local Link-Belt dealer for questions.

App features include...

- Machine location
- Fuel consumption
- Utilization report
- Fuel efficiency
- Analytical snapshots
- Idle rate
- DTC notification history
- Favorite list

Download Apple or Android app at **lbxco.com/apps** for phone and tablet.



Built Strong to Handle Anything

X4 machines are more rugged and durable, with robust structural improvements to the boom & arm structures, along with improvements to lower frame and travel components.



Boom & Arm

- Improved boss shapes reduce stress on boom and arm pin
- Cast boom tip for increased reliability



Lowers

- Thicker travel motor case - 28% increase
- 14% more stroke recoil spring
- 50% longer idler shoulder and hub
- Unique side-frame design reduces dirt accumulation and is easier to clean.



Customer Support is Just a Call Away

A network of Link-Belt Excavator dealers across the U.S. and Canada is waiting to serve you. Expect fast and dependable service, backed by 24/7 access to parts.

Exceptional Warranty Coverage

All X4 excavators purchased after July 1, 2020 are backed by a 5-year/5,000- hour Full Machine Warranty, 5-year/10,000- hour Structural Warranty, along with participation in the X4 Fluid Analysis Program for the duration of the warranty (free with all X4 machines). Extended warranty coverage packages are also available.

Contact your dealer for complete details.



SPECIFICATIONS

Engine

Isuzu AQ-6HK1X Final Tier 4 turbocharged diesel engine with electronic control (ECM) and high pressure common-rail fuel injection, 6-cylinder, water-cooled, Exhaust Gas Recirculation (EGR), Intercooler, Variable-Geometry Turbocharger (VGT), Diesel Oxidation Catalyst (DOC) and Selective Catalytic Reduction (SCR) system with Dosing Control Module and heated DEF lines and tank. Electronic fuel pump and priming, Fuel cooler, Auto-idle start, Auto warm-up, EPF engine protection, dual-stage fuel filtration, remote oil filter, engine oil sample port, green plug oil drain, double element air filter.

SAE J 1349 net horsepower	268 hp (200 kW) @ 1,900 rpm
Displacement	475 cu in (7.8 L)
Maximum Torque	729 lbf-ft (988 Nm) @ 1,500 rpm
Starter	24V-5.0kW
Alternator	50 amp
Battery	(2) 12-volt 128 amp hours

Cab and Controls

ROPS and FOPS Level 1 certified with automatic climate control A/C and heat with defroster, 7" LCD Hi-Definition color monitor with full time rear view camera display, fuel efficiency gauge, low-effort joysticks are pre-wired for auxiliary hydraulics, dual cab lights, control pattern changer, safety glass windows, sunroof with sunshade, shockless cab suspension with four fluid cab mounts, SCM High-Back reclining air-suspension seat, sliding 4-position tilting control consoles, AM/FM sound system with MP3 auxiliary input jack, digital clock, dome light, seat belt, coat hook, cup holder, storage compartments, floor mat, footrests, ashtray, 24V cigarette lighter, 12V outlet, travel alarm, handrails, mirrors, side-entry cab filter, spare parts kit.

Three selectable work modes, RemoteCARE Telematics GPS system, anti-theft password protection system, onboard self-diagnostic system with memory and service interval reminders, auto idling system, one-touch decelerator, auto-idle engine shutdown, auto-power boost, neutral safety start, gate-lock safety shutoff.

Hydraulic System

Open-center system, two variable-displacement electronically controlled axial-piston pumps and one gear pump for pilot controls, main control valve with one 4-spool section and one 5-spool section with auxiliary spool: stackable, Auxiliary Control System, oil cooler, Auto-Power boost, anti-drift valves, 6 micron return filter, firewall, hydraulic oil sample port.

Hydraulic Pumps

Pump Output	2 x 79.3 gpm (300 L/min)
Pilot Pump Maximum Flow	7.5 gpm (28.5 L/min)

Relief Valve Settings

Boom/Arm/Bucket	4,970 psi (34.3 MPa)
in Power Boost	5,410 psi (37.3 MPa)
Swing Circuit	4,410 psi (30.4 MPa)
Travel Circuit	4,970 psi (34.3 MPa)

Hydraulic Cylinders

	number of cylinders - bore x stroke
Boom	2 - 5.7" x 58.9" (145 mm x 1,495 mm)
Arm	1 - 6.7" x 68.8" (170 mm x 1,748 mm)
Bucket	5.9" x 47.6" (150 mm x 1,210 mm)

Swing

Planetary reduction powered by axial-piston motor, Internal ring gear with grease cavity for swing pinion, Swing bearing is single-row, shear type ball bearing, Mechanical disc swing brake, Auto-power swing.

Swing Speed	9.7 rpm
Tail Swing	11' 8" (3.55 m)
Swing Torque	82,600 lbf-ft (112 kNm)

Undercarriage

X Pattern carbody with 16' 4" (4.98 m) LC long undercarriage by 8' 6" (2.60 m) track gauge, Sealed and strutted track chain with track guide, Sealed rollers and idlers, Two-speed independent hydrostatic travel with compact planetary final drive, Disc type brakes, Adjustable track tension, Carbody belly pan.

Carrier Rollers	2 per Side
Track Rollers	8 per Side
Track Link Pitch	8.5" (216 mm)
Shoes	48 per Side
Shoe Width	31.5" (800 mm)
Ground Pressure	7.69 psi (0.053 MPa)

Travel System

Two-speed independent hydrostatic travel with compact axial-piston motors, Hydraulic motor powered output shaft coupled to a planetary reduction drive and track sprocket, All hydraulic components mounted within the width of side frame, Automatic downshift for high torque to overcome obstacles, Spring-applied hydraulic release parking brake built into each motor, Travel motors equipped with counterbalance valve to prevent over-speeding down an incline, Single-pedal straight line travel.

Travel Speeds	2.1 - 3.5 mph (3.4 - 5.6 km/h)
Drawbar Pull	58,200 lbf (259 kN)
Gradeability	70% (35°)

Attachment

Boom ..... 21' 2" (6.45 m)

Available Arms	Digging Force
• 10' 8" (3.25 m)	36,980 lbf (165 kN)
with Auto Power Boost	40,200 lbf (179 kN)
• 8' 8" (2.63 m)	43,770 lbf (195 kN)
with Auto Power Boost	47,590 lbf (212 kN)
• 13' 3" (4.04 m)	31,470 lbf (140 kN)
with Auto Power Boost	34,220 lbf (152 kN)
• Bucket Digging Force	51,640 lbf (230 kN)
with Auto Power Boost	56,160 lbf (250 kN)


Lubricant & Coolant Capacity

Fuel Tank	153 Gallons (580.0 Liters)
Hydraulic System	92 Gallons (350.0 Liters)
Hydraulic Tank	46 Gallons (175.0 Liters)
Final Drive (per side)	2.5 Gallons (9.5 Liters)
Swing Drive	1.3 Gallons (5.0 Liters)
Engine Oil	12.7 Gallons (48.0 Liters)
DEF Tank	40 Gallons (152.0 Liters)
Coolant System	10.0 Gallons (38.0 Liters)

Operating Weight


Working weight with 31.5" (800 mm) shoes, 21' 2" (6.45 m) boom, 10' 8" (3.25 m) arm, 2,601 lb. (1 180 kg) bucket, 16,300 lb. (7 400 kg) counterweight ..... 82,400 lbs. (37 400 kg)

Working Range & Dimensions

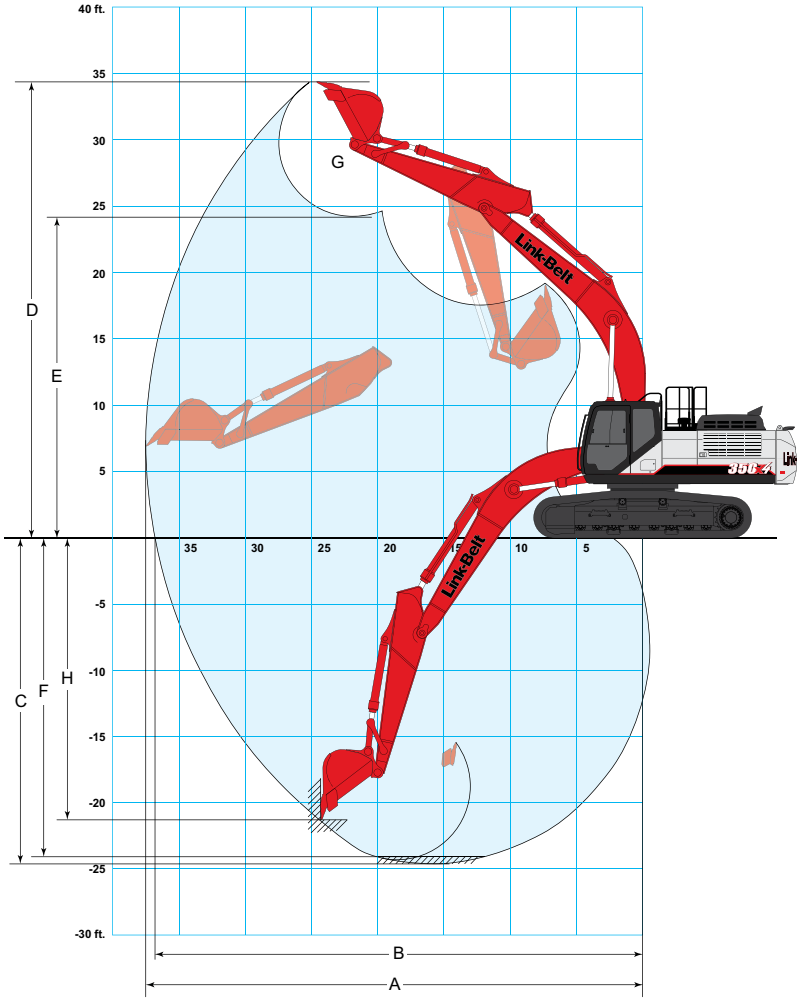

Machine Equipped with 21′ 2″ (6.45 m) Boom	Arm 10′ 8″ (3.25 m)	Arm 8′ 8″ (2.63 m)	Arm 13′ 3″ (4.04 m)
A. Maximum reach	36' 8" (11.17 m)	34' 11" (10.65 m)	39' 0" (11.90 m)
B. Maximum reach @ ground level	36' 0" (10.98 m)	34' 3" (10.45 m)	38' 5" (11.71 m)
C. Maximum dig depth	24' 1" (7.34 m)	22' 1" (6.72 m)	26' 9" (8.14 m)
D. Maximum dig height	34' 1" (10.38 m)	33' 9" (10.28 m)	34' 11" (10.65 m)
E. Maximum dump height	23' 9" (7.24 m)	23' 4" (7.11 m)	24' 8" (7.53 m)
F. Digging depth 8' (2.44 m) level bottom	23' 7" (7.19 m)	21' 6" (6.54 m)	26' 3" (8.01 m)
G. Bucket rotation	173°	173°	173°
H. Maximum vertical wall depth	20' 10" (6.34 m)	19' 7" (5.98 m)	23' 0" (7.01 m)

Dimensions

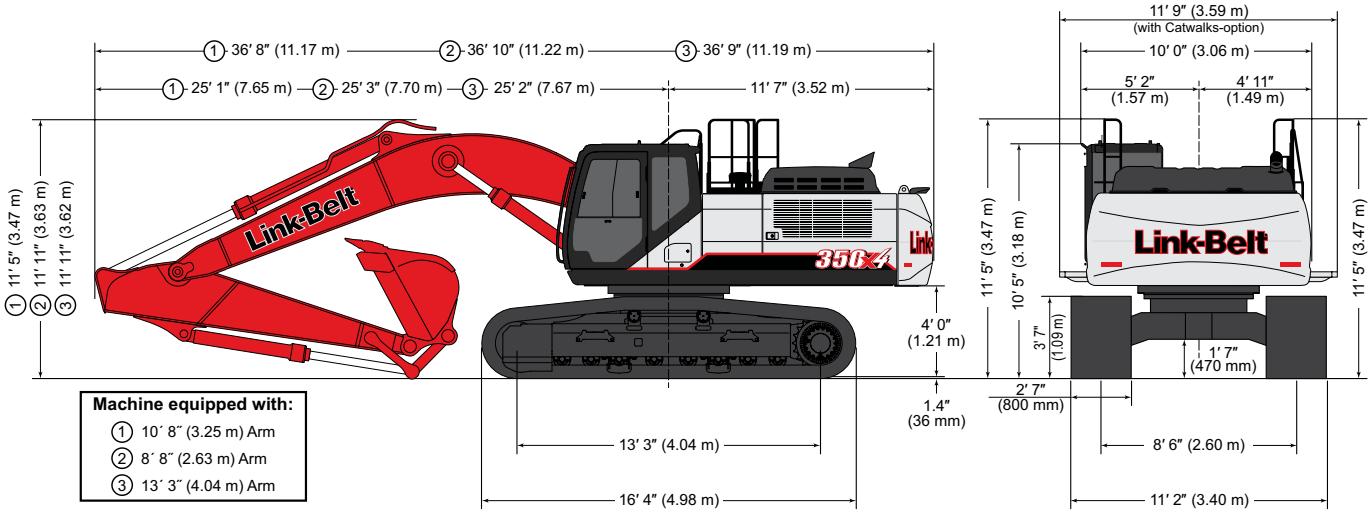

LIFT CAPACITIES

Radius of Load
10′ 8″ (3.25 m) Arm with 21′ 2″ (6.45 m) Boom and 2,600 lb. (1 170 kg) Bucket with Power-Boost Applied

End	Side		5' 0" (1.5 m)		10' 0" (3.0 m)		15' 0" (4.5 m)		20' 0" (6.0 m)		25' 0" (7.5 m)		30' 0" (9.0 m)		35' 0" (10.5 m)		Cap at Max. Reach	
			End	Side	End	Side	End	Side	End	Side	End	Side	End	Side	End	Side	End	Side
+30' 0" (9.0 m)	lbs																8,850*	8,850*
	kg																3 980*	3 980*
+25' 0" (7.5 m)	lbs										14,350*	14,350*	9,950*	9,950*			8,250*	8,250*
	kg										6 750*	6 750*	5 330*	5 330*			3 740*	3 740*
+20' 0" (6.0 m)	lbs										16,150*	16,150*	14,650*	12,000			8,050*	8,050*
	kg										7 380*	7 380*	6 690*	5 600			3 660*	3 660*
+15' 0" (4.5 m)	lbs								20,900*	20,900*	17,700*	16,000	15,700*	11,650			8,150*	8,150*
	kg								9 660*	9 660*	8 180*	7 440	7 270*	5 430			3 700*	3 700*
+10' 0" (3.0 m)	lbs				45,450*	45,450*	33,950*	33,300*	24,700*	21,800	20,000*	15,250	17,050*	11,250	9,550*	8,450	8,450*	8,350
	kg				17 480*	17 480*	15 740*	15 450	11 440*	10 110	9 230*	7 080	7 850*	5 230	5 450*	3 960	3 830*	3 780
+5' 0" (1.5 m)	lbs				17,200*	17,200*	39,150*	31,550	27,900*	20,450	21,850*	14,500	16,850	10,800	9,500*	8,300	8,950*	8,250
	kg				7 290*	7 290*	17 950*	14 650	12 900*	9 500	10 080*	6 750	7 830	5 030	5 600*	3 860	4 070*	3 730
Ground Line	lbs				23,350*	23,350*	40,950*	30,000	29,600*	19,500	21,950	13,950	16,450	10,500			9,850*	8,500
	kg				10 360*	10 360*	18 830*	13 940	13 680*	9 060	10 200	6 480	7 660	4 880			4 460*	3 850
-5' 0" (1.5 m)	lbs	23,250*	23,250*	31,800*	31,800*	40,800*	29,700*	29,700*	19,050	21,600	13,650	16,350	10,350				11,300*	9,200
	kg	10 400*	10 400*	14 140*	14 140*	18 840*	13 810	13 720*	8 850	10 040	6 340	7 590	4 810				5 090*	4 150
-10' 0" (3.0 m)	lbs	32,100*	32,100*	43,100*	43,100*	38,800*	30,000	28,700*	19,200	21,600	13,750						13,700*	10,550
	kg	14 390*	14 390*	19 080*	19 080*	17 930*	13 950	13 280*	8 910	10 030	6 390						6 160*	4 750
-15' 0" (4.5 m)	lbs	43,000*	43,000*	47,750*	47,750*	34,100*	30,500	25,400*	19,700	18,450*	14,350						16,150*	13,200
	kg	19 170*	19 170*	22 150*	22 150*	15 830*	14 180	11 840*	9 140	8 750*	6 650						7 300*	5 900
-20' 0" (6.0 m)	lbs			33,900*	33,900*	24,850*	24,850*	16,900*	16,900*								15,350*	15,350*
	kg			16 040*	16 040*	11 800*	11 800*	8 300*	8 300*								7 040*	7 040*

Radius of Load
8′ 8″ (2.63 m) Arm with 21′ 2″ (6.45 m) Boom and 2,750 lb. (1 240 kg) Bucket with Power-Boost Applied

End	Side		5' 0" (1.5 m)		10' 0" (3.0 m)		15' 0" (4.5 m)		20' 0" (6.0 m)		25' 0" (7.5 m)		30' 0" (9.0 m)		Cap at Max. Reach	
			End	Side	End	Side	End	Side	End	Side	End	Side	End	Side	End	Side
+30' 0" (9.0 m)	lbs														12,500*	12,500*
	kg														5 620*	5 620*
+25' 0" (7.5 m)	lbs										16,250*	16,250*			11,550*	11,550*
	kg										7 400*	7 400*			5 230*	5 230*
+20' 0" (6.0 m)	lbs										17,450*	16,150	15,650*	11,500	11,250*	10,600
	kg										7 970*	7 500*	7 140*	5 390	5 080*	4 770
+15' 0" (4.5 m)	lbs						27,700*	27,700*	22,350*	22,000	18,700*	15,500	16,550*	11,250	11,250*	9,450
	kg						12 770*	12 770*	10 350*	10 210*	8 650*	7 210	7 640*	5 250	5 110*	4 250
+10' 0" (3.0 m)	lbs						33,400*	32,900	25,900*	21,100	20,700*	14,800	16,900	10,850	11,550*	8,850
	kg						15 460*	15 250	12 010*	9 780	9 550*	6 870	7 870	5 070	5 260*	4 020
+5' 0" (1.5 m)	lbs						38,600*	30,450	28,550*	19,850	22,000*	14,100	16,500	10,500	12,200*	8,750
	kg						17 850*	14 130	13 210*	9 220	10 220	6 560	7 680	4 890	5 550*	3 970
Ground Line	lbs						40,600*	29,350	29,550*	19,050	21,600	13,600	16,250	10,250	13,350*	9,100
	kg						18 720*	13 650	13 660*	8 850	10 050	6 330	7 550	4 770	6 050*	4 120
-5' 0" (1.5 m)	lbs	21,500*	21,500*	32,150*	32,150*	39,850*	29,550	29,300*	18,850	21,400	13,450	16,300	10,300	15,200*	9,950	
	kg	9 280*	9 280*	14 270*	14 270*	18 380*	13 740	13 520*	8 750	9 960	6 250	7 560	4 780	6 880*	4 510	
-10' 0" (3.0 m)	lbs	35,450*	35,450*	46,900*	46,900*	36,800*	30,000	27,500*	19,100	20,850*	13,800			16,450*	11,700	
	kg	15 900*	15 900*	20 730*	20 730*	17 000*	13 950	12 750*	8 880	9 720*	6 390			7 470*	5 270	
-15' 0" (4.5 m)	lbs			41,400*	41,400*	30,700*	30,050	22,750*	19,650					15,850*	15,250	
	kg			19 220*	19 220*	14 290*	13 980	10 680*	9 120					7 150*	6 800	

Radius of Load
13′ 3″ (4.04 m) Arm with 21′ 2″ (6.45 m) Boom and 2,300 lb. (1 050 kg) Bucket with Power-Boost Applied

End	Side		5' 0" (1.5 m)		10' 0" (3.0 m)		15' 0" (4.5 m)		20' 0" (6.0 m)		25' 0" (7.5 m)		30' 0" (9.0 m)		35' 0" (10.5 m)		Cap at Max. Reach	
			End	Side	End	Side	End	Side	End	Side	End	Side	End	Side	End	Side	End	Side
+30' 0" (9.0 m)	lbs																6,650*	6,650*
	kg																2 990*	2 990*
+25' 0" (7.5 m)	lbs												11,250*	11,250*			6,250*	6,250*
	kg												5 320*	5 320*			2 820*	2 820*
+20' 0" (6.0 m)	lbs												13,000*	12,300	7,750*	7,750*	6,100*	6,100*
	kg												5 940*	5 740	4 170*	4 170*	2 760*	2 760*
+15' 0" (4.5 m)	lbs										15,800*	15,800*	14,400*	11,900	10,950*	8,800	6,150*	6,150*
	kg										7 290*	7 290*	6 670*	5 540	5 400*	4 120	2 790*	2 790*
+10' 0" (3.0 m)	lbs						29,600*	29,600*	22,400*	21,900	18,450*	15,550	15,800*	11,350	12,950*	8,550	6,400*	6,400*
	kg						13 770*	13 770*	10 350*	10 160	8 510*	7 220	7 280*	5 300	6 220	3 990	2 890*	2 890*
+5' 0" (1.5 m)	lbs			29,700*	29,700*	36,450*	32,450	26,050*	20,850	20,600*	14,650	16,850	10,850	13,050	8,250	6,800*	6,800*
	kg			12 660*	12 660*	16 890*	15 070	12 050*	9 670	9 510*	6 820	7 830	5 050	6 080	3 850	3 080*	3 080*
Ground Line	lbs	11,800*	11,800*	25,500*	25,500*	40,050*	30,200	28,500*	19,600	21,900*	13,950	16,450	10,400	12,800	8,000	7,450*	7,400
	kg	5 310*	5 310*	11 250*	11 250*	18 520*	14 040	13 180*	9 100	10 160	6 480	7 640	4 850	5 960	3 740	3 370*	3 360
-5' 0" (1.5 m)	lbs	20,650*	20,650*	30,550*	30,550*	40,600*	29,200	29,400*	18,800	21,400	13,450	16,100	10,150	8,800*	7,950	8,450*	7,900
	kg	9 270*	9 270*	13 570*	13 570*	18 750*	13 590	13 580*	8 740	9 960	6 250	7 500	4 710	5 250*	3 700	3 830*	3 590
-10' 0" (3.0 m)	lbs	27,900*	27,900*	38,700*	38,700*	39,700*	29,250	29,000*	18,700	21,300	13,350	16,150	10,150			10,150*	8,900
	kg	12 520*	12 520*	17 170*	17 170*	18 340*	13 610	13 400*	8 700	9 910	6 210	7 500	4 720			4 570*	4 020
-15' 0" (4.5 m)	lbs	38,250*	38,250*	50,500*	50,500*	36,600*	29,800	27,050*	19,050	20,550*	13,700					13,150*	10,750
	kg	17 030*	17 030*	22 600*	22 600*	16 970*	13 840	12 570*	8 840	9 600*	6 350					5 870*	4 820
-20' 0" (6.0 m)	lbs			42,500*	42,500*	30,100*	29,800	22,000*	19,500							14,900*	14,500
	kg			19 910*	19 910*	14 110*	13 860	10 400*	9 060							6 820*	6 430

Notes: Excavator lifting capacities

1. Lifting capacities shown should not be exceeded. Weight of all lifting accessories must be deducted from the above lifting capacities.
2. Lifting capacities are based on machine standing on firm, uniform supporting surface. User must make allowances for job conditions such as soft or uneven ground.
3. Lifting capacities shown do not exceed 75% of minimum tipping loads or 87% of hydraulic capacities. **Capacities marked with an asterisk (*) are limited by hydraulic capacities.**
4. Least stable position is over the side.
5. Operator should be fully acquainted with the Operator's Manual & Operating Safety Booklet, furnished by LBX before operating the machine.
6. Capacities apply only to the machine as originally manufactured and normally equipped by LBX Company, LLC.
7. Lift capacity ratings are based on ISO 10567, "Earthmoving Machinery - Hydraulic Excavators - Lift Capacity."

Standard & Optional Equipment

Standard Equipment

CAB

- 12V Power Outlet
- AM/FM Sound System
- Anti-Theft Device
- Auxiliary Switches on Control Lever
- Cab Filter - External
- Cab Handrails
- Cab Interior Light
- Cab ISO-Mounts
- Cab Light (2)
- Clear Roof Window
- Climate Control A/C and Heater
- Cup Holder
- Defroster
- Digital Clock
- Emergency Exit and Hammer
- Face Vent
- Floor Mat
- FOPS Level 1 Certified
- Front Window One-Touch Lock
- Gate Lock Hydraulic Activation
- Horn
- Hour Meter (Digital)
- LCD Color Monitor
- Magazine Storage Rack
- Maintenance Interval Reminders
- MP3 Auxiliary Input Jack
- On-Board Diagnostic System
- One-Piece Right Window
- Radio Mute Switch
- Rear View Camera
- Rear View Mirrors (2)
- RemoteCARE Support System (GPS)S
- Roof Sun Shade
- ROPS Certified Structure
- Safety Glass Windows
- SCM Air-Suspension Seat
- Seat Recline
- Selectable Monitor Languages
- Small Storage
- Travel Alarm with Cancel Switch
- Trip Meter (Digital)
- Wiper & Washer
- Wiper Switch on RH Joystick

ENGINE

- 50A Alternator
- Air Filter (Double Element)
- Air Filter Restriction Indicator
- Air Pre-Cleaner (Cyclone type)
- Auto Warm-Up System
- Auto-Idle
- Auto-Idle Engine Shutdown
- Battery Disconnect Switch
- Cooling Fan
- Diesel Oxidation Catalyst (DOC)
- Drain for Fuel Tank
- Dual Remote Fuel Filters with Water Separators
- EGR Coolers
- Emergency Engine Stop
- Engine Oil Sample Port
- Engine Protection Feature
- External Fuel Gauge
- External DEF Gauge
- Fan Housing
- Fuel Cooler
- Fuel Filter Restriction Indicator
- Fuel Management System
- Fuel Usage History
- Fuel Usage Monitor
- Glow Plug Pre-Heat
- Idle-Start
- Intercooler
- Neutral Start
- One-Touch Idle
- Radiator / Oil Cooler / Intercooler Protective Screen
- Remote Engine Oil Drain
- Remote Oil Filter
- Selective Catalytic Reduction (SCR)
- DEF Gauge on Monitor
- VGT Turbocharger

HYDRAULICS

- Anti-Drift Valves
- Arm Regeneration
- Arm Speed Assistance (2 Pump Flow)
- Attachment Cushion Valve
- Auto Swing Priority
- Auxiliary Flow Control
- Auxiliary Tool Settings (Memory)
- Auxiliary Valve
- Boom Regeneration
- Boom Speed Assistance (2 Pump Flow)
- Bucket Curl Assist
- Control Levers Pre-Wired for Auxiliary Hyd.
- Control Pattern Changer (2 way)
- Electronically Controlled Hydraulic Pumps
- Fire Wall
- Free Swing
- Hydraulic Filter Restriction Indicator
- Hydraulic Oil Sample Port
- Long Life Hydraulic Oil (5,000 Hour)
- Neutral Pump De-Stroke
- Oil Cooler
- Power Boost
- Power Save
- Pressure Reading on Monitor
- Pump Stand-By Pressure
- Single Pedal Travel

UNDERCARRIAGE

- 800 mm (31.5" in) 3-Bar Steel Grousers
- Carbody Belly Pan (Swivel Guarding)
- Center Track Guide (single)
- Lashing Points (Tie-Downs)
- Long Undercarriage
- Sealed Link Chain
- Steps
- Strutted Track Chain
- X-Pattern Carbody

UPPERSTRUCTURE

- Belly Pans
- Center Cover (Over Main CV)
- Fuel Tank Belly Pan
- ISO Guard Rails
- Lifting Eyes for Counterweight
- Lockable Fuel Cap and Service Doors
- Lockable Tool Box
- Work Lights (Boom and Tool Box)

ATTACHMENT

- 21' 2" (6.45 m) Main Boom Section
- Auxiliary Pipe Brackets
- Boom Work Light
- Chrome Pins
- HD Bucket Linkage
- Remote Lube Bank
- Teardrop Pin Retention Keepers

Optional Equipment

CAB

- 270° WAVES™ Camera System
- Cab Light (2 LED)
- Cab Sun Screen (rear)
- FOPS Head Guard (Level 2)
- Front Guard (Mesh)
- Front Guard (OPG 1,2)
- LED Light Kit for Side Camera (1)
- LED Lights for Rear Camera (2)
- Rain Deflector
- SCM Air-Suspension Seat with Tilt and Heater

ENGINE

- 90A Alternator
- Refuel Pump
- Tropical Package

HYDRAULICS

- Hose Burst Check Valve
- Proportional Hydraulic Controls

AUXILIARY HYDRAULIC OPTIONS

- Single-Acting Aux. w/Pedal Activation
- Single-Acting Aux. w/Proportional Joysticks
- Multi-Function Aux. w/Proportional Joysticks
- Multi-Function Aux. w/in-cab pressure setting control
- Thumb Aux. w/Proportional Joysticks
- Secondary Aux. w/Proportional Joysticks
- Combination Aux. w/Proportional Joysticks
- Combination Aux. w/in-cab pressure setting control
- Bucket Quick Coupler Hydraulics Line

UNDERCARRIAGE

- 600 mm (23.5" in) 3-Bar Steel Grousers
- 700 mm (27.5" in) 3-Bar Steel Grousers
- Center Track Guide (triple)

UPPERSTRUCTURE

- Rubber Bumper Guards

ATTACHMENT

- 8' 8" (2.63 m) Short Arm
- 10' 8" (3.25 m) Arm
- 13' 3" (4.04 m) Arm

Bucket Sizes

Bucket Type	SAE Heaped Capacity (yd³)	SAE Heaped Capacity (m³)	Width Outside Lip (in)	Width Outside Lip (mm)	Bucket Weight (lbs)	Bucket Weight (kg)	Number of Teeth	Arm Length 8' 8" 2.63 m	Arm Length 10' 8" 3.25 m	Arm Length 13' 3" 4.04 m
STDP Standard duty plate	1.26	0.96	30	762	2306	1046	4	H	H	H
	1.59	1.22	36	914	2516	1141	4	H	H	H
	1.92	1.47	42	1067	2786	1264	5	H	H	H
	2.25	1.72	48	1219	2956	1341	5	H	H	M
	2.59	1.98	54	1372	3226	1463	6	M	M	L
	2.93	2.24	60	1524	3396	1540	6	M	L	L
HDP Heavy duty plate	1.22	0.93	30	762	2886	1309	4	H	H	H
	1.54	1.18	36	914	3131	1420	4	H	H	H
	1.86	1.42	42	1067	3459	1569	5	H	H	H
	2.19	1.67	48	1219	3704	1680	5	H	H	M
	2.53	1.93	54	1372	4031	1828	6	M	M	L
XDP Extreme duty plate	1.22	0.93	30	762	3327	1509	4	H	H	H
	1.54	1.18	36	914	3620	1642	4	H	H	H
	1.86	1.42	42	1067	3994	1812	5	H	H	M
	2.48	1.90	48	1219	4287	1945	5	M	M	L
POWER HDP for use with ESCO multi-pin grabber only	1.08	0.83	30	762	3461	1570	4	H	H	H
	1.35	1.03	36	914	3688	1673	4	H	H	H
	1.62	1.24	42	1067	3860	1751	5	H	H	H
	1.90	1.45	48	1219	4030	1828	5	H	H	M
	2.18	1.67	54	1372	4257	1931	6	H	M	L
DITCH	2.20	1.68	72	1829	2971	1348	0	H	H	M

Approval Code For Arm/Bucket Combinations

H.....Heavy material (up to 3,370 lbs./yd³)
M.....Medium material (up to 2,700 lbs./yd³)
L.....Light material (up to 2,020 lbs./yd³)
N/A.....Not applicable

STDP.....Standard duty plate
HDP.....Heavy duty plate
XDP.....Extreme duty plate
POWER.....HDP for use with **ESCO** multi-pin grabber only

Litho in USA 08/20 #LBX2433 supersedes #LBX2398

LBX® and Link-Belt® are registered trademarks. Copyright 2020. All rights reserved. We are constantly improving our products and therefore reserve the right to change designs and specifications.